


### 1.1730 / 1.2510 / 1.2842

100 MnCrW4  
90MnCrV8

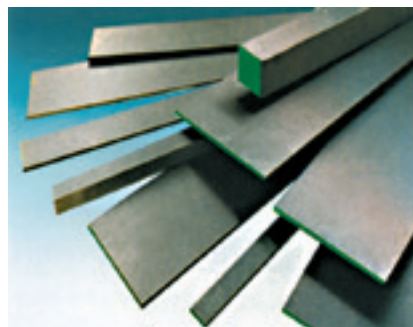

	C	Si	Mn	Cr	W	V	S
1,2842	0,90	0,20	1,90	0,40	-	0,10	0,03
1,2510	0,95	0,20	1,20	0,60	0,60	0,10	0,03
1,1730	0,45	0,30	0,70	-	-	-	0,03

Sezione

ACCIAIO PER LAVORAZIONE A FREDDO

Lunghezza standard : 500 mm

	1	1,5	2	3	4	5	6	8	10	12	15	18	20	25	30	40	50
6	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
8	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
10	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
12	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
15	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
18	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
20	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
25	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
30	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
35	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
40	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
45	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
50	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
60	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
70	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
75	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
80	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
90	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
100	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
120	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
125	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
150	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
160	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
180	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
200	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
250	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
300	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
*405	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
*505	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
	1	1,5	2	3	4	5	6	8	10	12	15	18	20	25	30	40	50

\* Spessore rettificato (Larghezza e lunghezza segati)

Quadro

Lati rettificati tolleranza + 0.1/0 mm

	4	5	6	7	8	10	12	15	16	18	20	23	25	30	40	45	50	60	80
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.

MISURE SPECIALI SU RICHIESTA